

Certificate

Certified Passive House component
for cold climate, valid until 31.12.2024

Category: **Facade anchor**
Manufacturer: **BEMO Systems GmbH**
74532 Ilshofen-Eckartshausen
GERMANY
Product name: **Tekofix A++**

The following criteria were used in awarding this certificate:

Efficiency Criterion

In a typical application*, the construction fulfills the requirements of

$$\text{Eff}_{\text{fa}} \leq 0.200 \text{ W/(kNK)}$$

Comfort Criterion

The inner surface must be warm enough to prevent mold as well as uncomfortable down-drought and radiation losses.


$$\theta_{\text{i,min}} \geq 17^{\circ}\text{C}$$

Thermal data of the certified component

	Thermal bridge coefficient	Minimum interior surface temperature
	χ [W/K]	$\theta_{\text{i,min}}$ [°C]
Sliding point (0°)	0.0024	19.50
Sliding point (45°)	0.0016	19.51
Fixed point**	0.0041	19.42
FP sheet metal	0.0029	19.38

* The criterion has been validated with a representative facade of a school building

** The fixed point comprises both, a horizontal and an inclined stainless-steel anchor

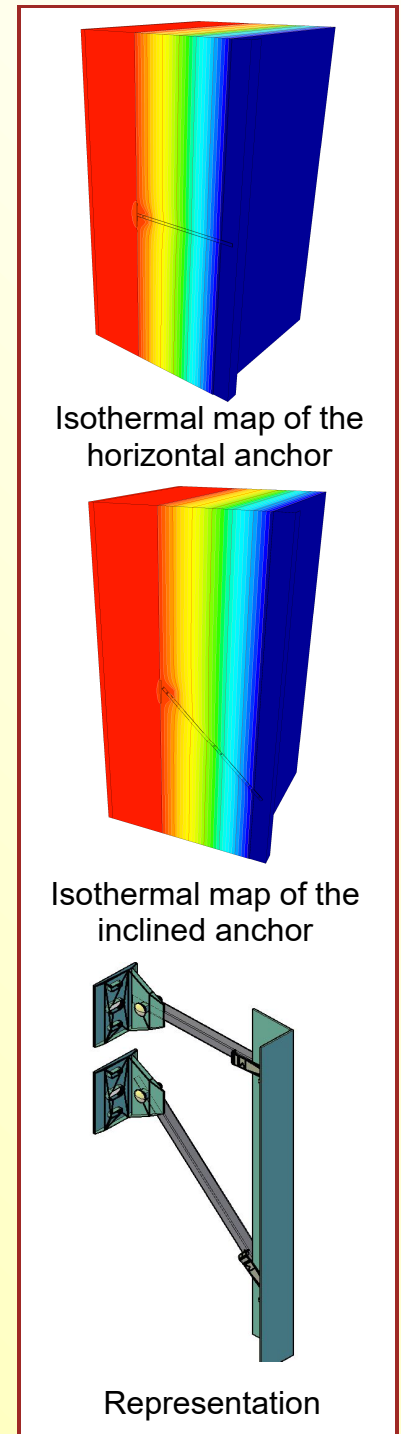

Data sheet

BEMO Systems GmbH, Tekofix A++

Manufacturer BEMO Systems GmbH
 Max-Eyth-Straße 2, 74532 Ilshofen-Eckartshausen, GERMANY
 www.bemo.com

Criteria validated based on reference facade	Δ_U [W/m²K]
LC VI	0.0051

In order to validate the suitability, the manufacturer provides a static calculation and an associated installation plan for the reference facade.

Load class / Facade weight		Thermal bridge coefficients [W/K]	
LC	[kN/m ²]	X _{FP}	X _{SP}
VI	0.60	0.0041	0.0024
Efficiency	Δ_U	Quantity / m ²	
[W/(kNK)]	[W/m ² K]	FP	SP
0.0085	0.0051	0.721	0.891



Installation-plan reference facade of the certified component

Load-class (LC)	Facade cladding	Facade weight [kN/m ²]	Efficiency criterion fulfilled?
I	ACM	0.10	yes
II	HPL	0.15	yes
III	Fibre-cement-plates	0.20	yes
IV	Fibre-cement-plates	0.25	yes
V	Glassfacade	0.30	yes
VI	Marble	0.60	yes

The classification criteria and the load class allocation can be found in the current criteria "Zertifizierte Passivhaus Komponente – Fassadenanker, Version 2.0, 08.05.2017".